





宏聚电子五金制品有限公司

HONGJU ELECTRONIC & METAL PRODUCTS CO.,LTD


FH1-200C

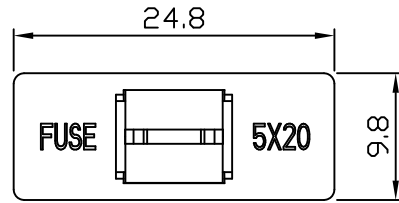

Fuse holder for overload protection



Rating: 10A 250VAC (UL,CUL)

Fuse:Ø5.0x20mm




Operating Temperature:0°C~+85°C

Dielectric Strength: 1500VAC 1 minute

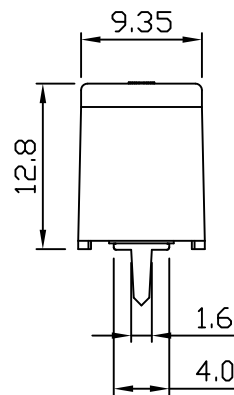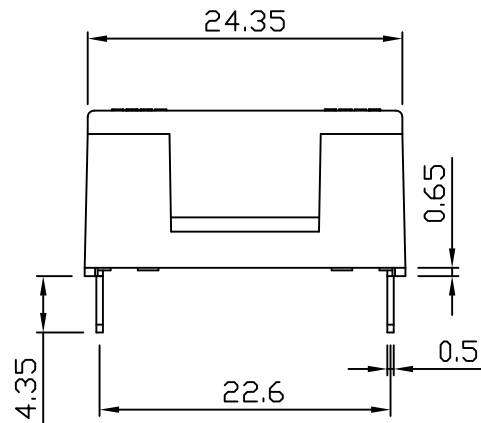

P.C.B.LAYOUT

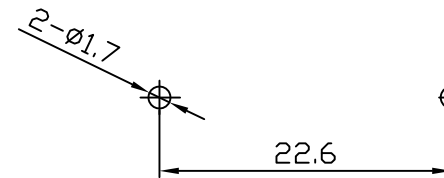

MATERIAL:

Housing:PBT,UL rated 94V0 min

Bayonet:PBT,UL rated 94V0 min

Terminal:Phosphor bronze,silver or tin plated

				公差 TOLERANCES				角度 ANGLE ± 1°		单位 DIMENSION UNIT mm.	
A2	重新整理发行	2019.12.13	N/A	版本:	.X±0.3	.XX±0.15	比例尺	日期	品名	图号	
A1	重新整理发行	2014.07.26	N/A	VERSION	A2		SCALE	2019.12.13	TITLE	DRAWING NO	
A0	New Issue	2009.02.26	N/A	核准			核对	绘图	FH1-200CK-G	FH1-200CK-G_A2	
版本 VER	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO	APPROVED BY			CHECKED BY	DRAWN BY			