



Specifications
 Circuit :SPST
 Current rating :50mA
 Voltage rating :12VDC
 Dielectric withstanding voltage:250VAC for 1 minute
 Contact resistance :100mΩ Max. (Initial)
 Insulation resistance :100MΩ Min.
 Operating force :300±50gf
 :200±50gf
 Total travel :0.25mm±0.1mm
 Operating life :100,000 cycles Min
 Solder specifications :260° C for 5 seconds
 Function :Momentary
 Operating temperature :+10° C ~ +60° C

P.C.B. LAYOUT

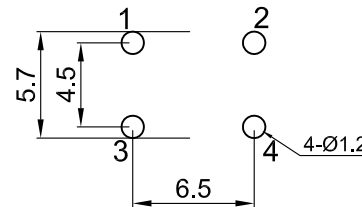

CIRCUIT



MATERIAL:

Base Frame: Nylon46, UL rated:94 V-2 Min. ;
 Outer Frame: Nylon66, UL rated:94 V-2 Min. ;
 Actuator: PBT, UL rated:94 V-2 Min. ;
 Cap: ABS ;
 Terminal: Brass, Silver or Tin plated .

				公差 TOLERANCES		.X± 0.3 .XX± 0.15		角度 ANGLE ± 1°		单位 DIMENSION UNIT	mm.
A2	重新整理后发行	2019.10.16	N/A	版本 VERSION	A2	比例尺 SCALE	NONE	日期 DATE	2019.10.16	品名 TITLE	图号 DRAWING NO
A1	重新整理后发行	2014.07.17	N/A	核准		核对		绘图	王立权	TS2-1A-1RN	TS2-1A-1RN_A2
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY		CHECKED BY		DRAWN BY			